













Test rapportage koplampen







Start: 2022-02-03_13.43.20

	TEMPORARY	
		No user 

				
Asymmetrisch (RHD, EU)	Bi led	-1.2 %	80 cm	0 km




Test samenvatting

Linker dimlicht

Icon: -1.0 %

-1.0 % ✓
(-1.0 %)

Icon: -1.4 %

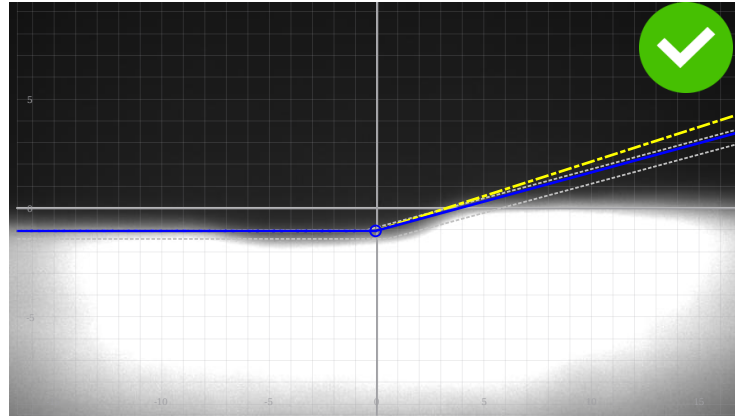

35 lx ✓

17.59 °

0.00 °

-0.5 %

-0.1 % ✓
(-0.1 %)


0.5 %

Linker grootlicht

Icon: 2.5 %

0.3 % ✓
(0.3 %)

Icon: -2.9 %

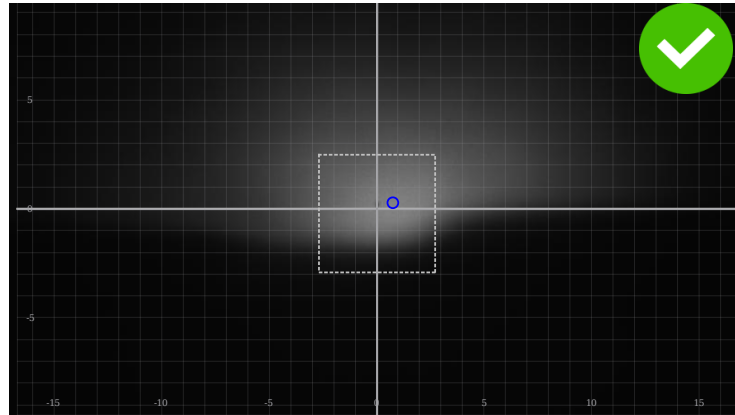

100 lx ✓

-2.7 %

0.7 % ✓
(0.7 %)


2.7 %

Linker mistlamp

Icon: -0.5 %


-2.4 % ✓
(-2.4 %)


Icon: -3.5 %

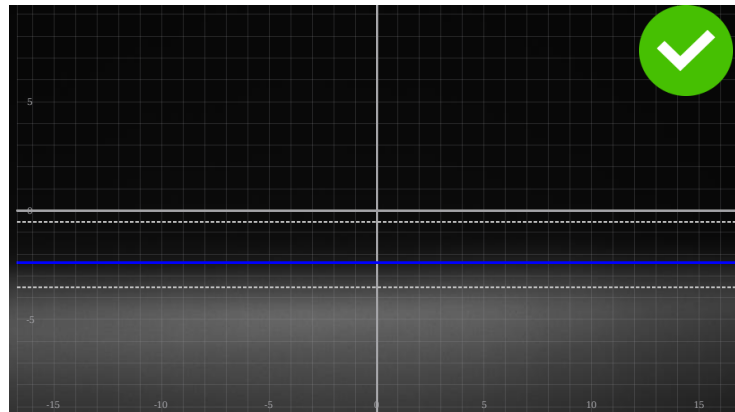



5 lx ✓


Rechter dimlicht


 -1.0 %
-1.1 % ✓
 (-1.1 %)


 -1.4 %

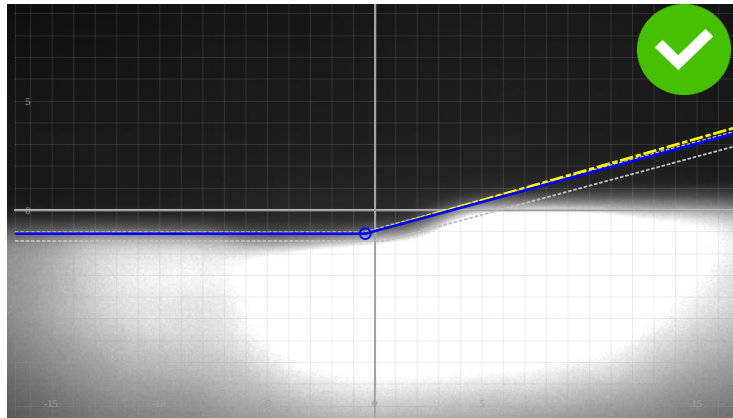


32 lx ✓ 

15.80 ° ° 


0.00 ° ° 


-0.5 % 


-0.5 % ✓
 (-0.5 %)

0.5 % 


Rechter grootlicht

 2.5 %
0.6 % ✓
 (0.6 %)

 -2.9 %

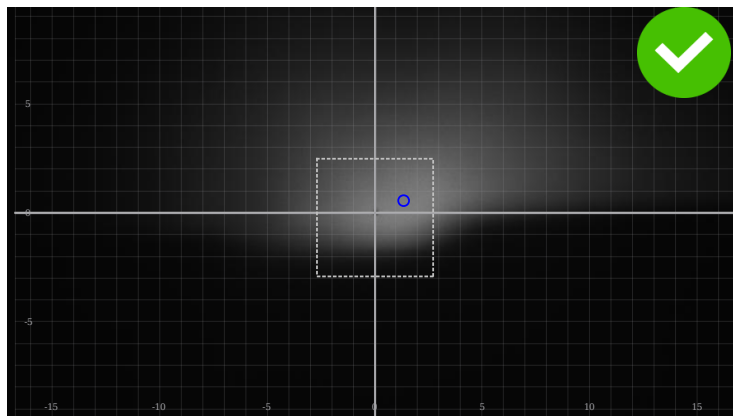


96 lx ✓ 


-2.7 % 


1.3 % ✓
 (1.3 %)

2.7 % 

Rechter mistlamp

 -0.5 %
-2.2 % ✓
 (-2.2 %)

 -3.5 %

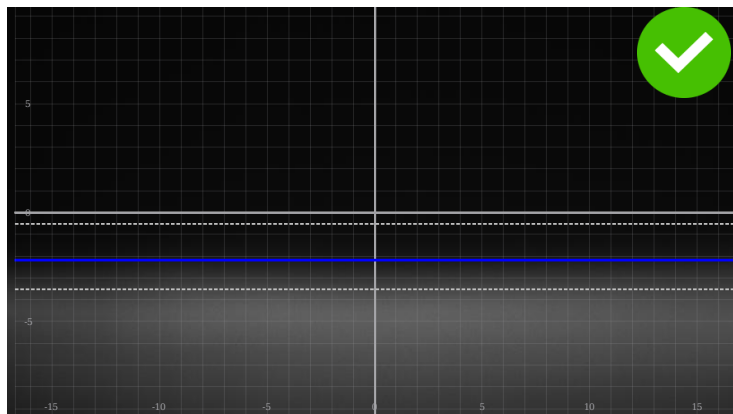

5 lx ✓ 

Apparaat:

Protocol	Merk	Model	Serienummer	Firmware	Verlopen van kalibratie
0.4.0.2	TEXA	OneD	CB2MF000097	0.4.0.2 - 0.9.0	